






DIN
1988

DIN EN
806

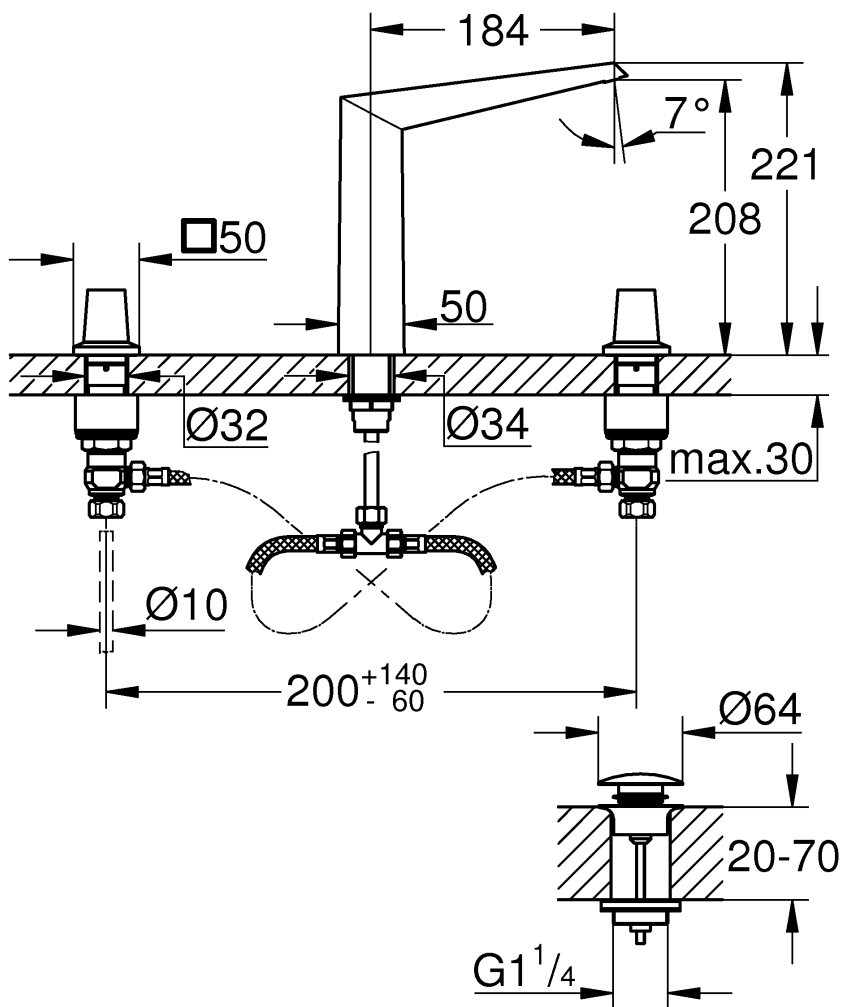

0,5

max.

10



5



1




max.
70°




60°

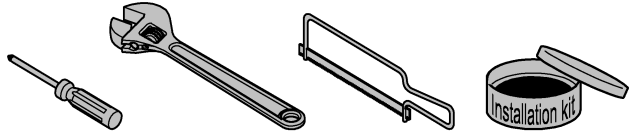

1

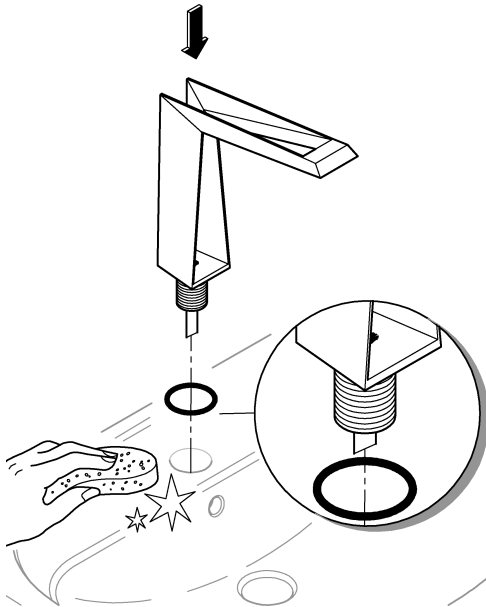


2

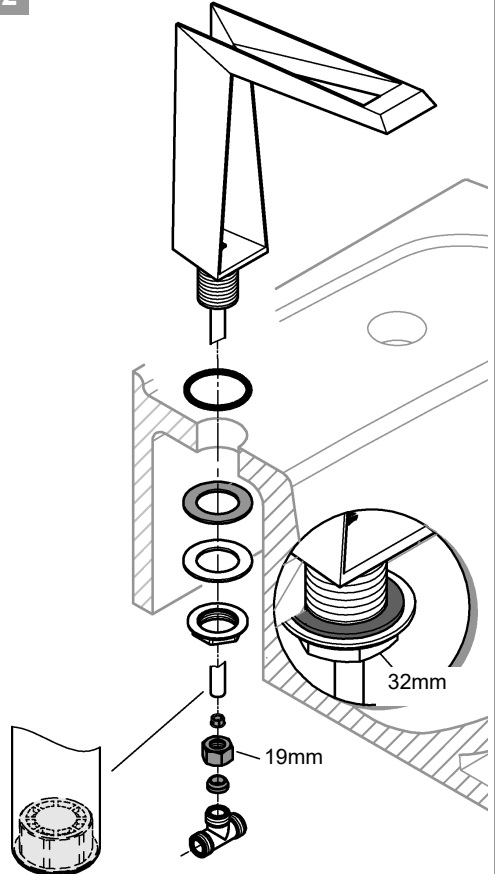






3


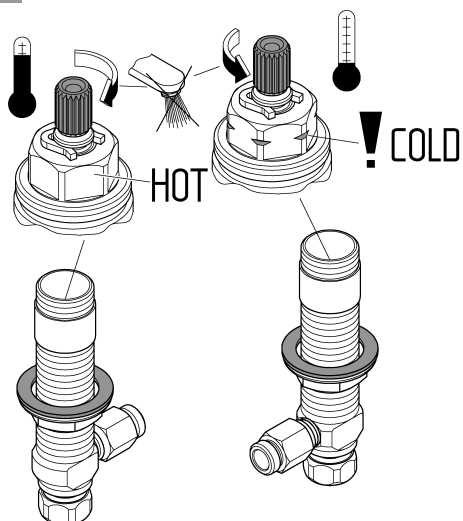


4

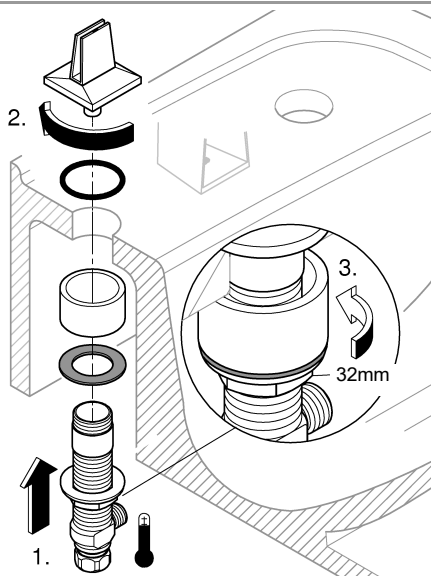

5

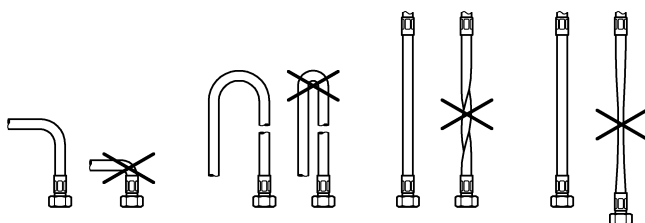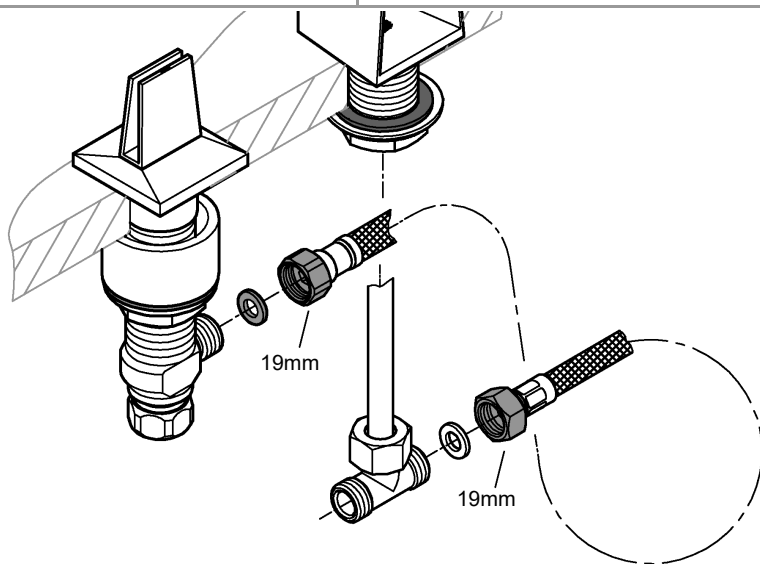

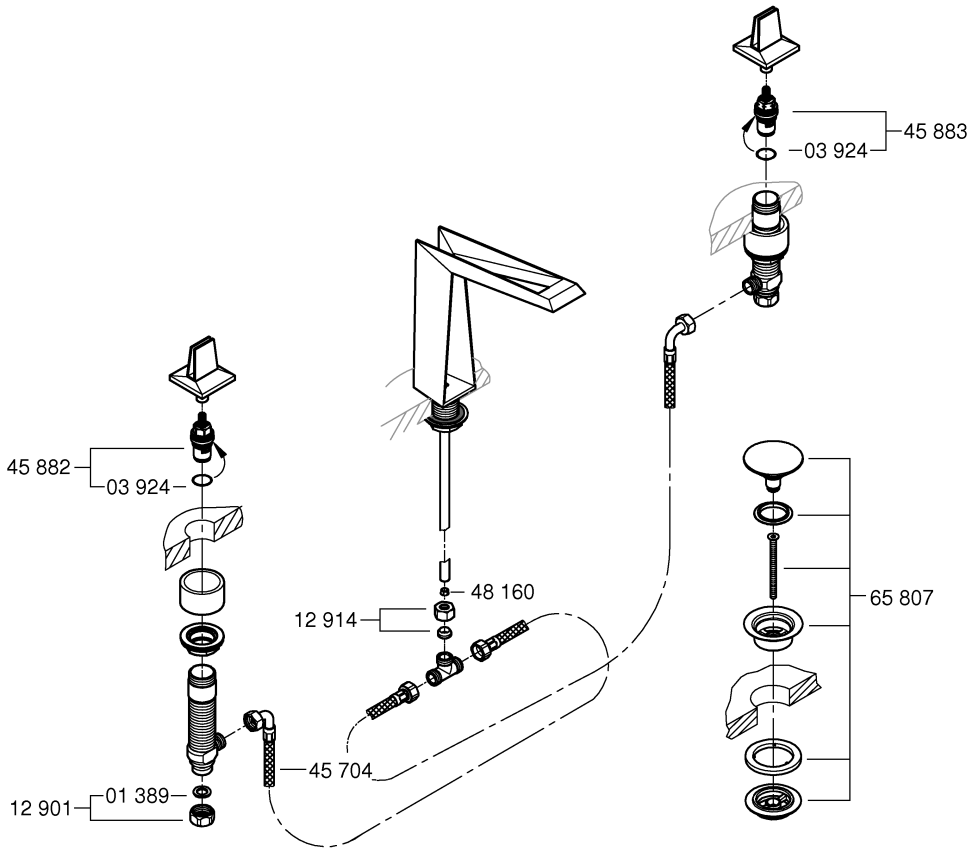

	12 901	Ø10,5
	*12 902	Ø14,3

